


3

4


2

1

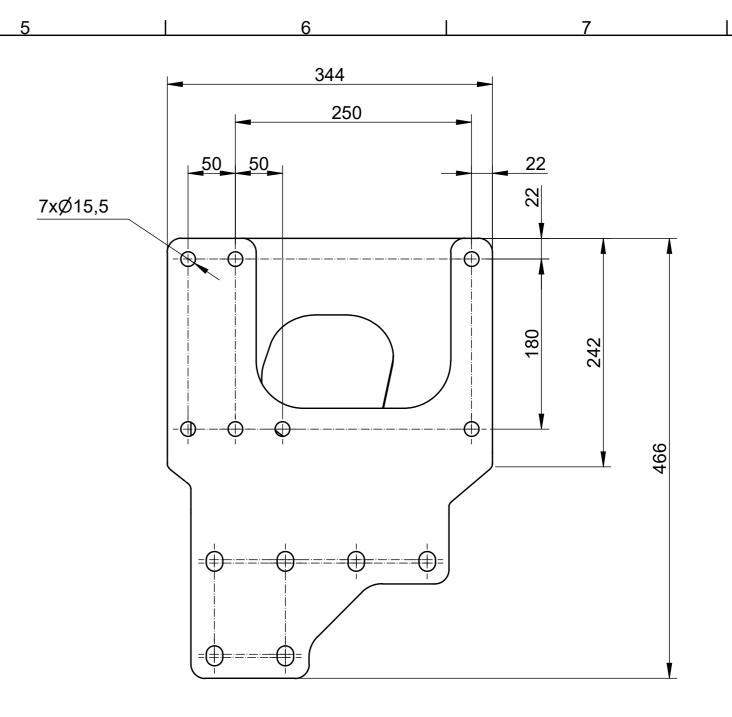

4x Screw M16x50/38 DIN 6921 10.9 4x Nut M16 DIN 6927 10

5



5 All products, product specifications & data are subject to change without notice.




 $\sqrt{4}$ Required frame stiffness for valid R58-03 certificate *— min 5700 cm4.*



3 VBG Installation Report 38-321500

 $\boxed{2}$ For type approval information, see protective beam.



Modification No 13387 Modified Date Modified b 2020-04-15 PA **VBG GROUP** 3D Model No. 21-718200 Engineer PA A2 Scale Projection Drafting Date Drafted by 2020-04-15 PA Set of EUP180-MFC H190 P 21-718200(F) INFO drawing is the property of VBG Group AB and is protected in accordence with ailing law. Changes must be made in CAD-program, this concerns both 2D & 3D. 6 Released